

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001095

International filing date: 23 March 2005 (23.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0406439.0  
Filing date: 23 March 2004 (23.03.2004)

Date of receipt at the International Bureau: 09 May 2005 (09.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed   
Dated 19 April 2005

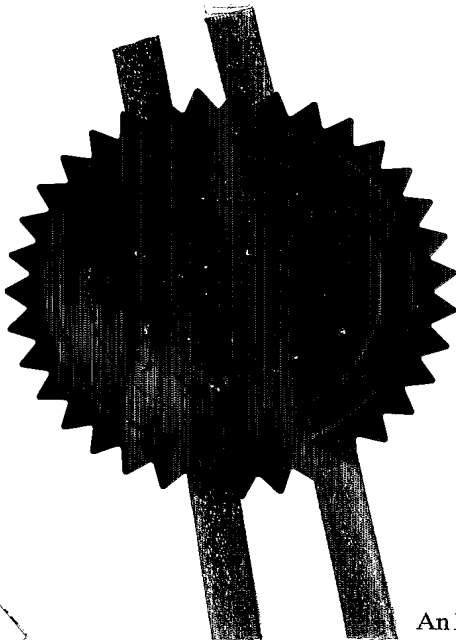



Patents, 1977  
(Rule 16)

# The Patent Office

23MAR04 E883032-1 D01038  
P01/7700 0.00-0406439.0 NONE

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

C

23 MAR 2004

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

NEWPORT

1. Your reference P305215GB

2. Patent application number  
(The Patent Office will fill in this part)

0406439.0

23 MAR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Tempus Computers Limited  
St Pauls House  
St Pauls Square  
Birmingham  
B3 1RB  
United Kingdom

6352358001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Rear Vehicle Docking Station

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 6  
Claim(s) 3  
Abstract 1  
Drawing (s) 4 + 4 fm

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)


Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 22-3-04

12. Name and daytime telephone number of person to contact in the United Kingdom Keith Tart 0121 245 3900

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# **Improved Docking Station**

The present invention relates to a docking station for a portable computer.

The apparatus of the present invention is particularly well suited for use in a vehicle; for example the rear of a van. However it may also be used for static storage; for example to charge or securely store a laptop during periods of non-use.

Docking stations for laptop computers are widely available. While some such docking stations are designed for use in vehicles, these generally aim to assist an occupant of the vehicle to safely use such a computer. Portable computers are widely used by service engineers and the like who travel from site to site in vans carrying service parts. Typically, such a user requires access to the laptop on arrival at a site; often desiring to remove the laptop from the vehicle for on-site use. Further, the engineer may receive data via the laptop while in transit or use the laptop in transit; for example, as part of a global positioning system to assist navigation. In addition after several such visits there is often a need to recharge such device.

An aim of the present invention is to provide an improved portable computer docking station. A further aim is to provide apparatus that allows electrical connectors in the apparatus, in use, to be accurately aligned with and then engage/abut corresponding terminals on a portable computer to allow data transfer. Accurate alignment is important if premature wear of electrical connections between the apparatus and a portable computer is to be avoided. A further aim is to provide apparatus that securely holds a portable computer within a moving vehicle. Another aim is to provide apparatus that allows a portable computer to be securely stowed away so as to deter theft. A further aim is to provide an apparatus that allows a portable computer to be readily stowed away and to be charged and/or send and receive data while being stowed.

In one aspect the invention provides a computer docking apparatus for use with a portable computer comprising a cradle member suitable for receiving a portable computer and a base member; a electrical contactor assembly configured to operably engage a corresponding terminal on a computer and attached to the base member; adjustment means

that allow the position of the cradle member to be changed relative to the base member from a first position to a second position, such that a portable computer may be inserted into or removed from the cradle when in the first position, and in the moving the apparatus from the first position to the second position causes the electrical contactor assembly to engage the computer to allow the establishment power and/or data-transfer connections between the docking apparatus and the computer.

In another aspect the invention provides a computer docking apparatus for use with a portable computer comprising: a cradle member suitable for receiving a portable computer; a closure member; and an electrical connector assembly that operably makes power and/or data-transfer connections to the computer, the connector assembly being attached to the closure member wherein; the position of the closure member relative to the cradle member may be changed such that the computer may be inserted into or removed from the cradle when the closure member is in the a first position and moving the closure member from this first position to a second position causes the electrical connector assembly to engage the computer to allow power and/or data-transfer connections between the docking apparatus and the computer.

The adjustment means may comprise a pivotal connection between the cradle member and the base member. The adjustment means may also take many other forms; for example telescopic mounts that allow all or part of the cradle member to move relative to the base member using gas struts, telescopic arms and the like and optionally providing generally parallel movement of the base member relative to the carrier member.

The base member may be an under-side tray and this tray may also either allow or prevent a portable computer to be inserted within the cradle. The underside tray may have locking means for securing the underside tray to the cradle member in a closed position; preferably the lock is a high security type lock, to deter theft.

The electrical contactor assembly may comprise a plurality of electrodes and these electrodes may supported on the electrical contactor assembly by resilient means; for example by using a leaf-spring electrode. The electrical contactor assembly may be slideably mounted to the base member; for example at least one bore in the slide mount may be dimensioned to

closely slide within a shaft member mounted to the cradle member. The bore may be biased in a direction away from the base member by a spring or the like; thus, biasing means such as a spring may, in use, bias the mount in a direction towards the corresponding terminal of a portable computer.

Preferably, the cradle member comprises a main outer body member and an insert member made at least in part from plastics material or other materials that avoid undue wear of the computer case in use. The cradle preferably has alignment means that ensure that when a portable computer is fully inserted within the cradle that the electrical contactor assembly is accurately aligned with a corresponding terminal on the computer. The alignment means may comprise guide members or rails located on the inside of the cradle member or insert member and/or an aperture in the insert member at least partly surrounded by a guide wall. The alignment means are particularly beneficial when it is necessary for the contactor assembly to have many terminals; for example in some cases up to 100 pins/electrodes may be required. In such cases alignment is particularly critical if damage to the contactor mechanism through prolonged use is to be avoided.

The apparatus preferably includes a power supply unit for providing power to a computer and/or charging cells in the computer; this may be located in a rear panel that also includes at least one interface printed circuit board .

The cradle member may be fixed to a mounting; for example, in a vehicle, so that in use the base member moves and the cradle member is static. Alternatively, the base member may be fixed to a mounting so that in use the cradle member moves and the base member is static. The position of the base member relative the cradle member may be adjusted by electro-mechanical means.

The electrical contactor assembly may engage a corresponding terminal on the underside of a portable computer or it may engage a corresponding terminal on the rear or side of a portable computer.

The apparatus is particularly for use in any vehicle, and particularly a road vehicle such as a service van.



The invention will now be described by reference to the following diagramatic drawings in which:

Figure 1 shows a preferred embodiment of the invention in as a perspective view in exploded form;

Figure 2 shows the upper part of the apparatus of Figure 1 in more detail;

Figure 3 shows the lower part of the apparatus of Figure 1 in more detail; and

Figure 4 shows the electrical connector assembly of Figure 1 in more detail.

Referring to Figure 1; this shows the four major components of a preferred embodiment of the apparatus according to the invention. The docking station 10 comprises a cradle member 12; a lower tray 14 pivotably attached to the cradle by pivot means 16a, 16b located at the rear of the cradle member 12 and of the lower tray 14. Electrical connector assembly 18 is mounted by resilient means to the base 20 of lower tray 14. A power supply and/or interface panel 22 is secured to the rear of cradle member 12. The electrical connector assembly receives power supply and data input/output connections via interface panel 22. In use the front face 24 of lower tray pivots downwardly, about pivots 16a, 16b so that it is clear of the front opening of the cradle member 12. This allows a portable computer such as a laptop computer to slide into the cradle; optionally assisted by alignment means such as guide rails 26. The lower tray 14 may the be closed by pivoting upwardly and locked in this closed position. As the lower tray is closed electrical connector assembly 18 also moves upwardly and engages a multi-way electrical connector located on the underside of the inserted computer (not shown). Thus, in a single movement of the lower tray 16 about pivot 16 the apparatus is closed and electrical contact is made between the laptop and external services.

Figure 2 shows the cradle member 12 in more detail. The main body of the cradle 30 comprises a lower plate 32 with an aperture 34 provided to allow pivotal movement of the connector assembly 18 and a larger opening at the front end to accommodate a lock fitted to the lower tray 14 (see below). The main body 30 further comprises side walls 36 and rear wall 38. The roof of the main body 30 comprises roof side sections 40 and central panel 42 attached to the side panels by bolts 44. Each side wall 36 has an arcuate shaped slot 46 that

engages a member of the lower tray 14 (see below) to limit the degree to which this lower member may pivot downwardly. Main body 30 is preferably made of a metallic material; for example steel, and houses a plastic insert member 50 that has a base 52, a rear wall 54 and side walls 56 that are in general dimensioned to fit closely within the main body 30 and are secured therein by bolts/screws 66. Base 52 has an aperture 58 formed from the base and also from surrounding wall 60 so that in use it is aligned with aperture 34 in the main body. In addition to lower guide rails 26, the side walls 56 each have an upper guide rail, secured in place by bolts/screws 58. The lower rear corners of the main body each have a pivot member 16a attached thereto by means of bolts 64 or the like.

Figure 3 shows the lower tray 14 in more detail. Lower tray 14 comprises a base 70, a front panel 72, and a pair of side walls 74 each with an arcuate-shaped extension member 76. In use, arcuate member 76 co-operates with slot 46 to limit the degree to which the lower tray may pivot relative to the cradle member 12. End stops 78 are attached by a bolt to the free end of each arcuate member which in use abut a stop bar 80 (see Figure 1) located across the arcuate slot 46. A lock 82 is attached by bolts to base 70 and has a catch member 84 that in use engages a slight recess 86 (see Figure 2) within lower plate 32 of main body cradle 30.

Figure 4 shows an enlarged perspective view of electrical contactor assembly 18. Assembly 18 comprises a slide mount 100 with bores 102 at each end dimensioned to allow heads 104 to slide closely therewithin. Heads 104 have taper threads (not shown) that connect with threaded ends 108 of mounting shafts 106. Heads 104 each have a flat face to assist tightening and bores 102 are correspondingly shaped. In use, mounting shafts 106 are attached to tray member 14 and springs 110 are positioned around shafts 106 and between lower tray 14 and slide mount 100. Electrical contactors 112, 114 are fixed to the top face of slide mount 100 by screws and fixing plate 116 respectively. Connector 112 comprises 15 individual spring leaf electrodes.

Contactor assembly 18 is located within aperture 58 and surrounding wall 60 of insert member 50. In use, assembly 18 moves upwardly and downwardly through aperture 58 and guide wall 60 as the lower tray is closed and opened respectively. Springs 110 and leaf spring electrodes 112 provide resilience upon contact between the connector 18 and the underside of a portable computer. This ensures that the electrodes are firmly held in place, but that

excessive force that might damage the contacting mechanism is avoided. The upper tapered portion of heads 104 engage holes in the base of the portable computer (not shown) and thus ensure general alignment of the connector prior to electrical engagement.

Where electro-mechanical means are used to alter the position of the base member relative to the cradle member, this may automatically activated by insertion of the portable computer within the cradle member; this is particularly beneficial if closure means are also activated directly or indirectly by this electro-mechanical means. Thus, on insertion of a portable computer the electro-mechanical means may move the closure member to prevent removal of the computer and move the electrical contactor assembly to make contact with the computer. The closure means need not necessarily be a door or the like, it can comprise means of locking the portable computer within the cradle. Further partial insertion of the portable computer within the cradle may activate electro-mechanical means that complete the insertion process. Locking of the personal computer to the cradle or locking of a tray member, door or the like may be automatic upon insertion or part insertion of the portable computer within the cradle.

The base member need not necessarily be connected to any closure means. Thus, when the apparatus is in a first position a portable computer may be inserted within the cradle without causing possible damage to the electrical contactor assembly. However, in the second position the electrical contactor assembly moves (with the base member) so that it abuts contacts on the portable computer. In this second position removal of the portable computer is restrained in order to prevent possible damage to the contactpr assembly.

## CLAIMS

1. A computer docking apparatus for use with a portable computer comprising a cradle member suitable for receiving a portable computer and a base member; an electrical contactor assembly configured to operably engage a corresponding terminal on a computer and attached to the base member; adjustment means that allow the position of the cradle member to be changed relative to the base member from a first position to a second position, such that a portable computer may be inserted into or removed from the cradle when in the first position, and wherein moving the apparatus from the first position to the second position causes the electrical contactor assembly to engage the computer to allow the establishment of power and/or data-transfer connections between the docking apparatus and the computer.
2. Apparatus according to Claim 1 wherein the adjustment means comprises mechanical or electro-mechanical means.
3. Apparatus according to Claim 2 wherein the adjustment means comprises a pivotal connection between the cradle member and the base member.
4. Apparatus according to any preceding claim wherein the base member comprises an under-side tray.
5. Apparatus according to Claim 4 wherein the underside tray has locking means for securing the underside tray to the cradle member in a closed position.
6. Apparatus according to any preceding claim wherein the cradle member has alignment means that ensure that when a portable computer is fully inserted within the cradle that the electrical contactor assembly is accurately aligned with a corresponding terminal on the computer.
7. Apparatus according to any preceding claim wherein the cradle member comprises a main outer body member and an insert member made at least in part of plastics material,

carbon-fibre, rubber or a similar materials that avoid undue wear to the outer case of the portable computer due to repeated insertion and removal.

8. Apparatus according to Claims 6 or 7 wherein the alignment means comprise guide members located on the inside of the cradle member or insert member.
9. Apparatus according to Claim 6 wherein the alignment means comprises an aperture in the insert member at least partly surrounded by a guide wall.
10. Apparatus according to any preceding claim wherein the electrical contactor assembly comprises a slide mount attached to the cradle member either directly or indirectly and biasing means that, in use, bias the mount in a direction towards the corresponding terminal of a portable computer.
11. Apparatus according to Claim 10 wherein the slide mount comprise at least one bore in the slide mount with a pin dimensioned to closely slide within the bore and the biasing means comprises a spring.
12. Apparatus according to Claim 1 wherein the cradle member is fixed to a mounting so that in use the base member moves and the cradle member is static.
13. Apparatus according to Claim 1 wherein the base member is fixed to a mounting so that in use the cradle member moves and the base member is static.
14. Apparatus according to any preceding claim comprising closure means that either allow or prevent a portable computer to be inserted within the cradle.
15. Apparatus according to Claim 14 wherein the closure means is secured in the closed position by means of a high security lock to deter theft.
16. Apparatus according to any preceding claim wherein the electrical contactor assembly engages a corresponding terminal on the side, rear or underside of a portable computer.

17. Apparatus according to any preceding claim used in a vehicle.
18. A computer docking apparatus for use with a portable computer comprising: a cradle member suitable for receiving a portable computer; a closure member; and an electrical connector assembly that operably makes power and/or data-transfer connections to the computer, the connector assembly being attached to the closure member wherein; the position of the closure member relative to the cradle member may be changed such that the computer may be inserted into or removed from the cradle when the closure member is in the a first position and moving the closure member from this first position to a second position causes the electrical connector assembly to engage the computer to allow power and/or data-transfer connections between the docking apparatus and the computer.
19. A computer docking apparatus for use with a portable computer substantially as described above and/or as illustrated in Figures 1 to 4.

## ABSTRACT

**Improved Docking Station**

A computer docking apparatus for use with a portable computer, particularly in vehicles, comprising a cradle member suitable for receiving a portable computer and a closure member; an electrical connector assembly that operably makes power and/or data-transfer connections to the computer; the connector assembly being attached to the closure member the position of which may be changed such that the computer may be inserted into or removed from the cradle when the closure member is in the a first position and moving the closure member from this first position to a second position causes the electrical connector assembly to engage the computer to allow power and/or data-transfer connections between the docking apparatus and the computer.

(Figure 1)

1/4

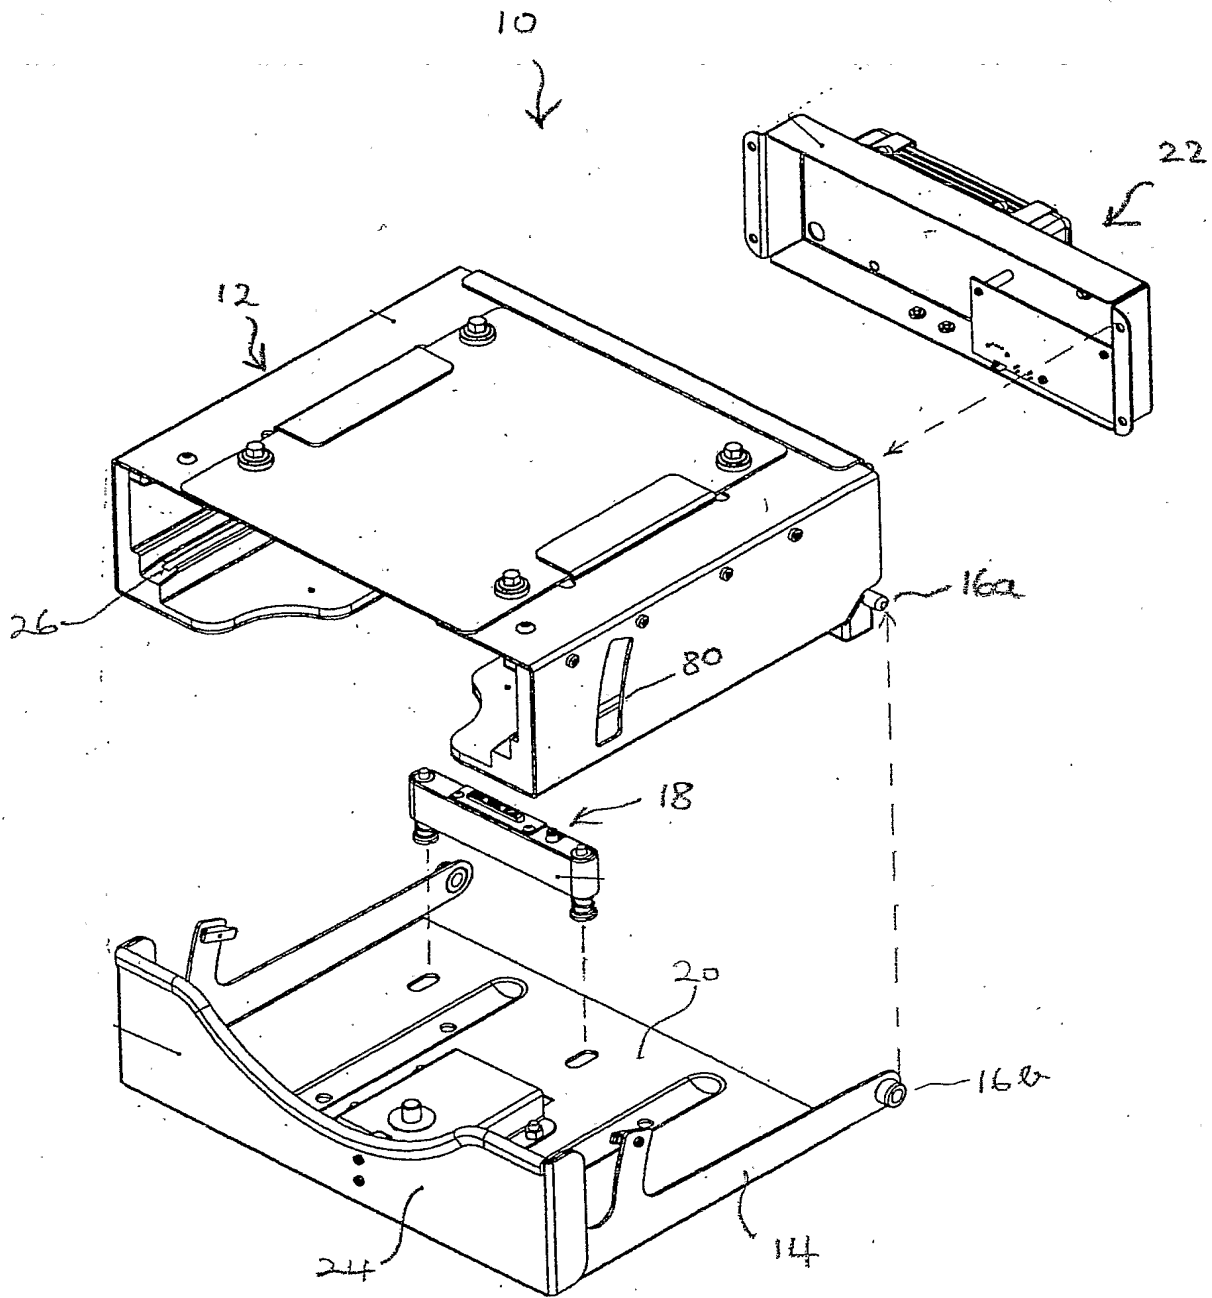


FIG 1





2/4

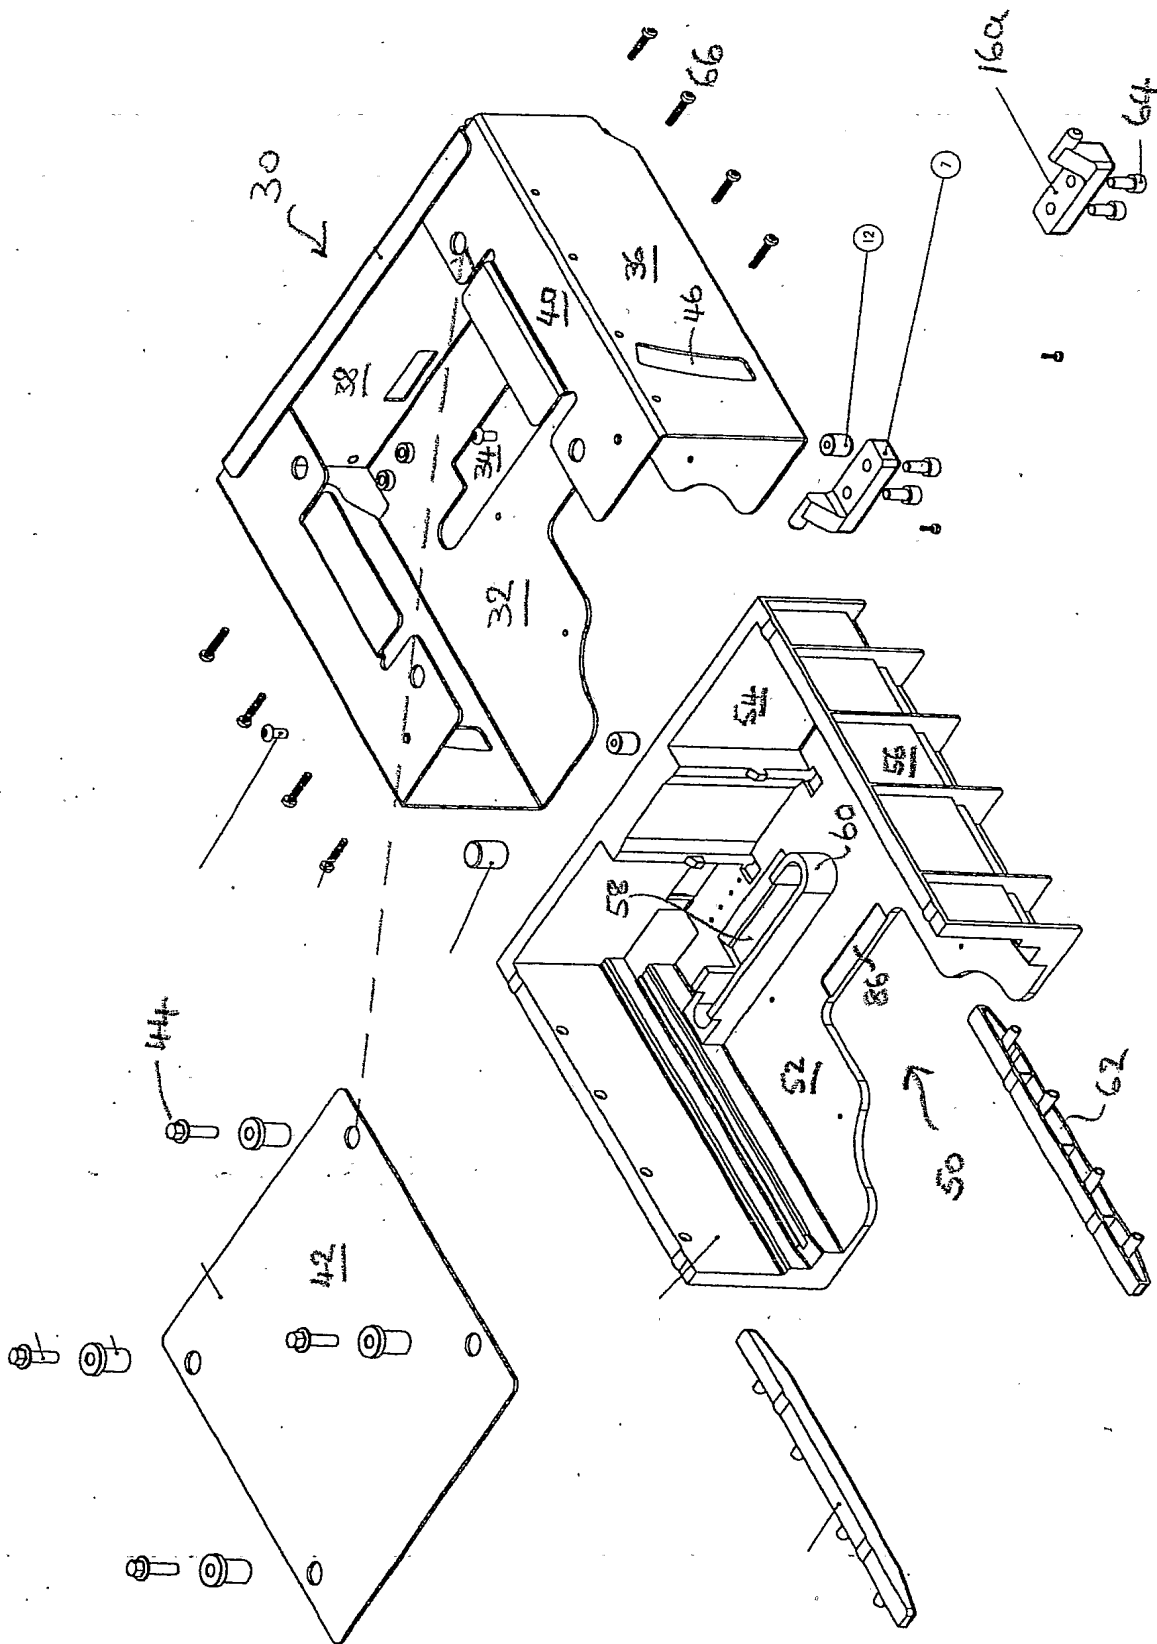


FIG 2



3/4

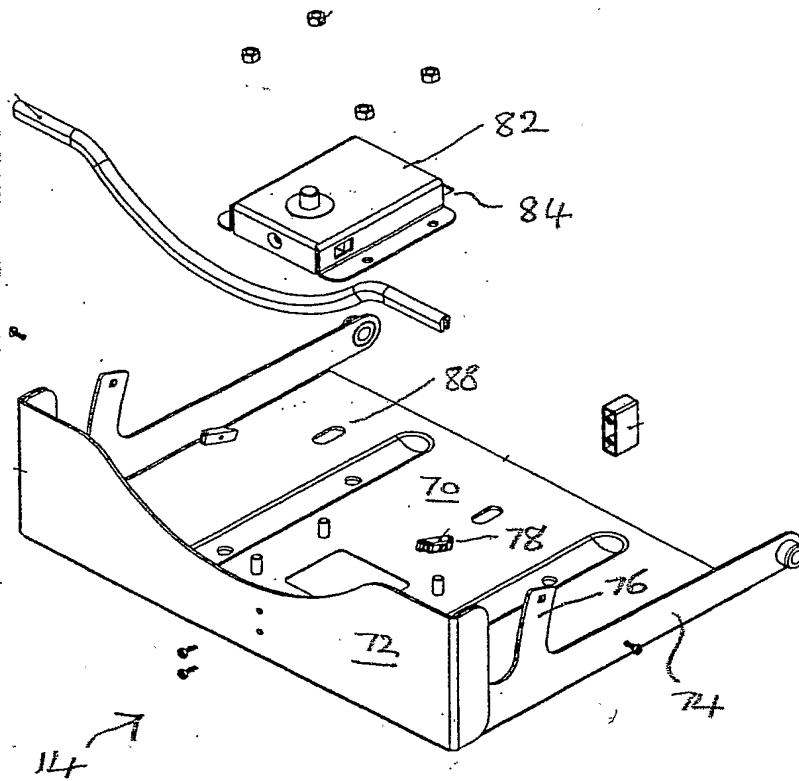


FIG 3





